

HDB15M



HDB15F

NOTE:

1. CABLE: 28AWG,UL2919,AL+B-FOIL,3COXIAL+7C,BLACK WITH EMBOSS,OD=9.0mm,PVC JACKET
2. LENGHT: 20M
3. CONNECTOR: HDB15F*1,HDB15M*1CUT 9 PIN)(BLUE INSULATOR).
4. MOLD: ASS'Y OUT SHELL
5. SCREW: INCH SHORT SCREWS*4PCS
6. CONTACTS:

HDB15M	1	2	3	6	7	8	4	5	10+11	12	13	14	15	64
HDB15F	1	2	3	6	7	8	4	5	10+11	12	13	14	15	64
	R	G	B	R	G	B								
	C	C	C	G	G	G								

7. OPEN/SHORT TEST: 100% TEST.
INSULATION: 2M.

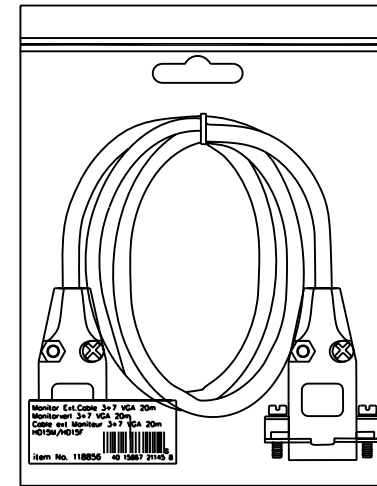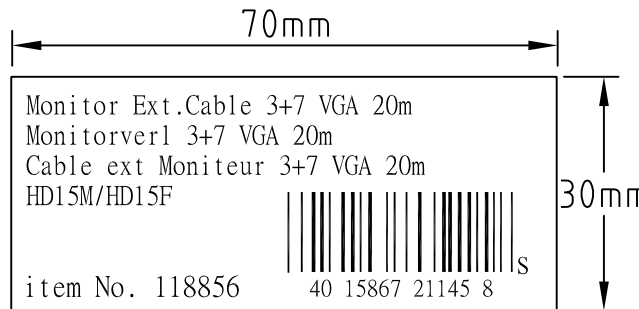

PE BAG WITH ZIPPER(280*360*0.08)
5PCS/CTN

COMPANY		ITEM NO.	118856		
REVISION	DATE	DISCRIPTION	DRAWN BY		
REV.A/0	20.10.17	PRODUCTION	DESIGNED BY		
REV.A/1	2005.03.03	MD PIN OUT	APPROVAL BY		



SCALE	NON
UNIT(mm)	
DRAWING NO.	