


1. CABLE: 28AWG,UL2725,AL+B-F OIL,28AWG\*1P+26AWG\*2C. BEIGE COLOR,OD=4.5mm,PVC JACKET,meet RoHS.
2. LENGTH: 1.0m / 1.8m / 3.0m / 5.0m
3. CONNECTORS:USBM(A)\*1, USBM(B)\*1<WHITE INSULATOR>
4. MOLD: MOLDIGN USB(A/B) TYPE.
5. CONTACTS:

USBM(A)	1	2	3	4	64
USBM(A)	1	2	3	4	64
	RED	WHITE	GREEN	BLACK	SHIELD
		#28	#28		
		PAIR			

6. OPEN/SHORT TEST: 100% TEST.  
INSULATION: 2M.

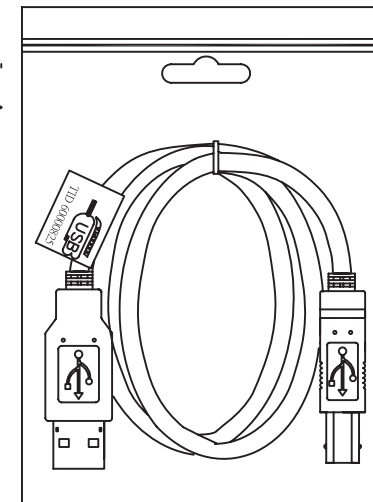

1PCS/equip ZIPPER BAG(175x275mm )+LABEL

COMPANY			ITEM NO.		NO B			
REVISION	DATE	DISCRIPTION	DRAWN BY			USB 2.0 Cable A/M -> B/M double shielded, beige		
REV.A/0	2006.03.27	s	DESIGNED BY				SCALE	NON
			APPROVAL BY				UNIT(mm)	
						DRAWING NO.		