
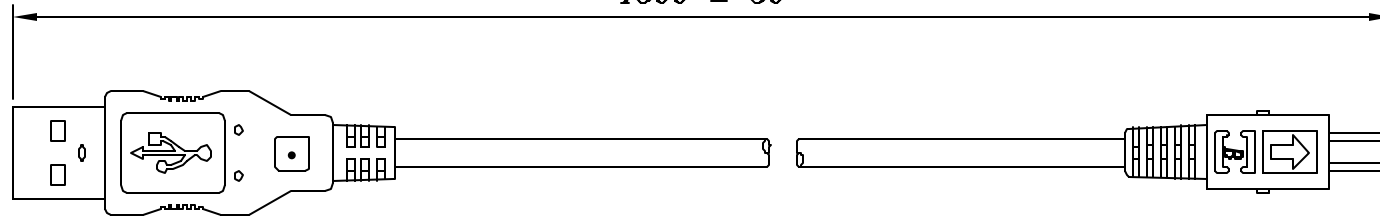



USB A TYPE MALE
PLASTIC:WHITE

1800 ± 30

P1



P2



NOTES:

1.CABLE:

UL-2835 28AWG(7/0.127)*2C+28AWG(7/0.127)*1PR
+AL-FOIL/MYLAR+BRAID (65%) PVC JACKET
OD:3.6±0.15mm COLOR:BEIGE(NK-A03) REV 2.0

2.CONNECTORS:

**P1:USB A TYPE MALE GOLD PLATED 30u" CONTACT
NICKEL PLATED SHELL REV 2.0**

**P2:(MITZUMI)MINI USB 4P MALE GOLD FLASH CONTACT
NICKEL PLATED SHELL.EQUIVALENT (B TYPE)**

3.HOOD:MOLDED TYPE, PVC 45P, COLOR:BEIGE(NK-A03)

4.TEST REQUEST:

<1>.100% OPEN SHORT & MIS WIRE TEST.

<2>.CONTACT RESISTANCE 3 Ohm MAX.

<3>.INSULATION RESISTANCE 20M Ohm MIN.

5.PACKING:EACH PC / Equip ZIP BAG (A) + BAR CODE LABEL

BAR CODE:4015867107812

10 PCS / BIG PE BAG

50 PCS / CARTON

0.56 CUFT / CARTON

X(a,b,c,d...)

P1

P2

RED	1	_____	1
WHITE	2	_____	2
GREEN	3	_____	3
BLACK	4	_____	4



SHELL — BRAID — SHELL

Tolerance	Inch	M/M
.X	.015	.30
.XX	.010	.10
.XXX	.005	.05



USB 2.0 Cable A/M ->Mini 4P/M

BAR CODE LABEL:

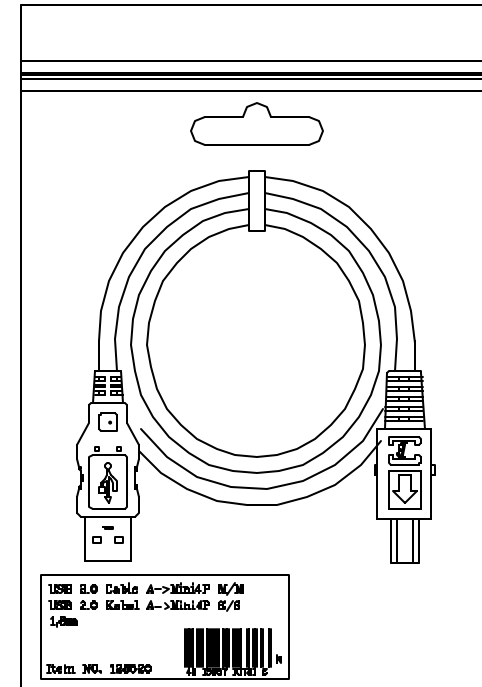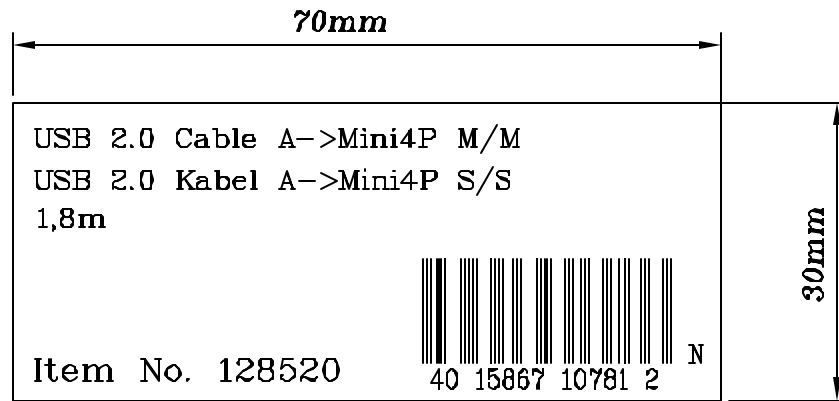

PE BAG WITH ZIPPER(250*170*0.08mm)

Tolerance Inch M/M		
.X	.015	.30
.XX	.010	.10
.XXX	.005	.05



USB 2.0 Cable A/M ->Mini 4P/M