


LTR	REV.	DESCRIPTION	DATE

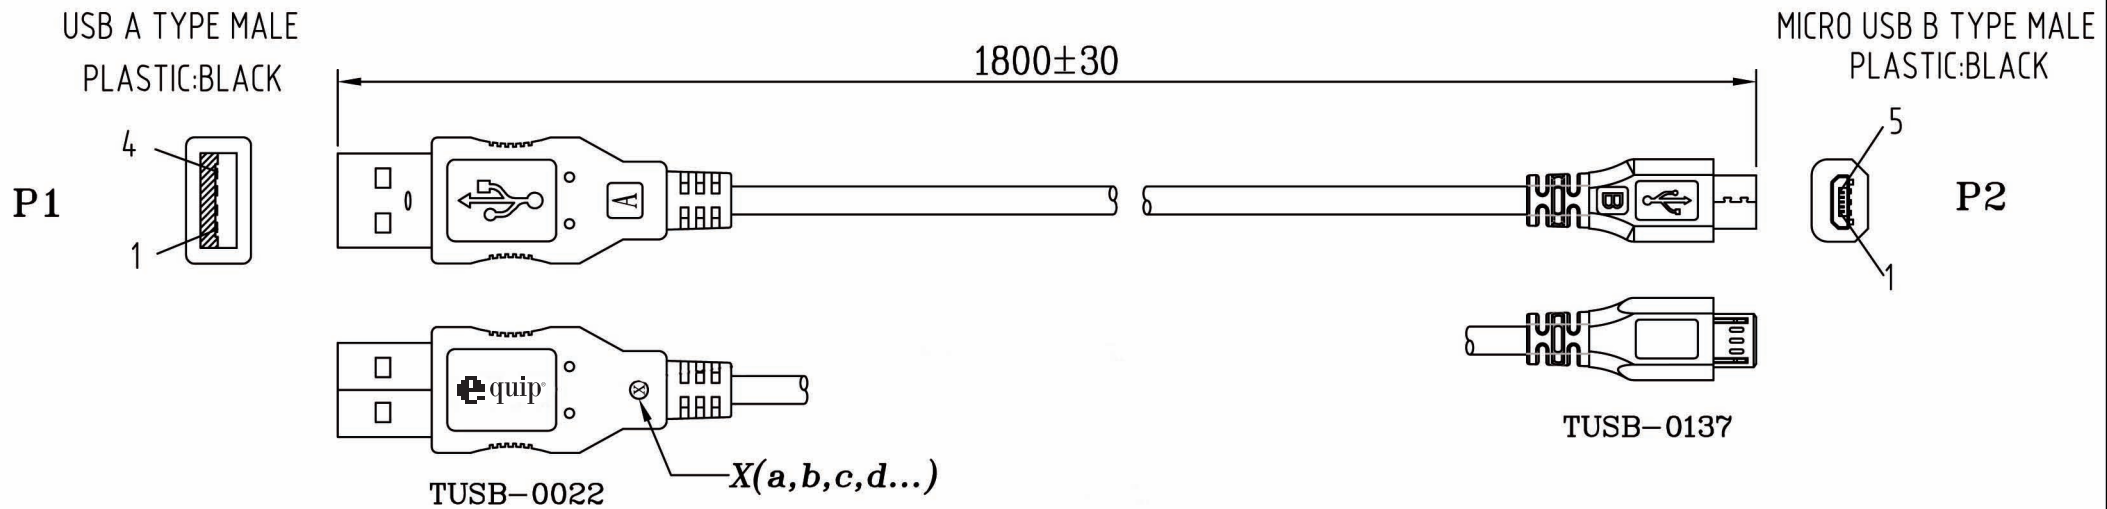

NOTES:

1.CABLE:

UL-2725 [28AWG(7/0.127)*1P INS:HD-PE ID:0.8±0.05
 +28AWG(7/0.127)*2C INS:PP ID:0.63±0.05+AL-FOIL/MYLAR
 +DRAIN WIRE(7/0.127)+BRAID 85%]TIN PVC JACKET;
 OD:3.0±0.15mm COLOR:BLACK(NK-K01) REV 2.0

2.CONNECTORS:

P1:USB A TYPE MALE GOLD PLATED 30u" CONTACT,
 NICKEL PLATED SHELL REV 2.0

P2:MICRO USB B TYPE MALE GOLD PLATED 30u" CONTACT,
 NICKEL PLATED SHELL REV 2.0

3.HOOD:MOLDED TYPE, PVC 45P, COLOR:BLACK(NK-K01)


4.TEST REQUEST:

- <1>.100% OPEN SHORT & MIS WIRE TEST.
- <2>.CONTACT RESISTANCE 3 Ohm MAX.
- <3>.INSULATION RESISTANCE 10M Ohm MIN.

5.PACKING:EACH PC / equip ZIP BAG(A)

100 PCS / CARTON(SZIE:370*240*180mm)

PIN OUT

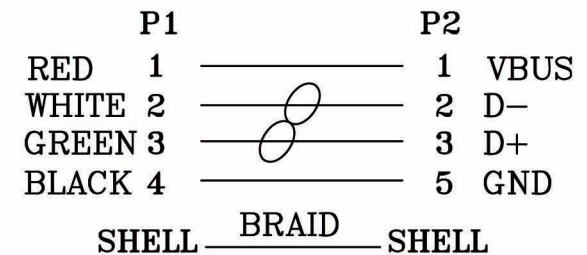

Tolerance	Inch	M/M
.X	.015	.30
.XX	.010	.10
.XXX	.005	.05



USB 2.0 Cable Type A/M > Micro B/M, black