



USB 2.0 ACTIVE EXTENSION CABLE

133310 / 133311

The equip[®] USB 2.0 Active Extension Cable brings the best performance at maximum reach. With the cascade feature, the cable carries data signal with high integrity up to 60 meters. An optional power adapter is on demand to guarantee the power supply while connecting to devices with high power consumption.

| Specification

Connectors	1 x USB A Type Male
	1 x USB A Type Female
Power	USB Bus-powered or Self-Powered
Physical Properties	Color: Black
	Plastic Housing
	Weight: 403g (133310) / 601g (133311)
	Cable Length: 10m (133310) / 15m (133311)

| Ordering Information

PN	EAN	Package Size	Weight
133310	4015867460061	217 x 145 x 73mm	480g
133311	4015867459980	217 x 145 x 73mm	680g

| Key Features



- Data Transfer Rate up to 480Mbps
- Over-current Detection and Protection
- Daisy-chain Connection up to 4 layers
- Plug and Play, Hot Swappable
- Fully Shielded for Error-free Connections
- LED Indicator for Data Link
- USB Bus-powered or Self-powered

| Package Contents

- 1 x USB 2.0 Extension Cable

RoHS compliant


REV	MODIFICATION	DATE
A	ISSUE	09/27/2020

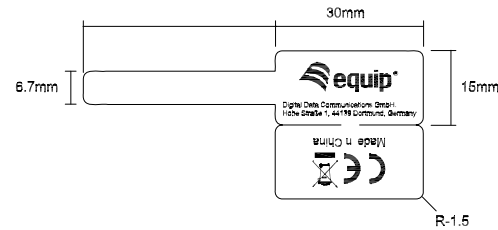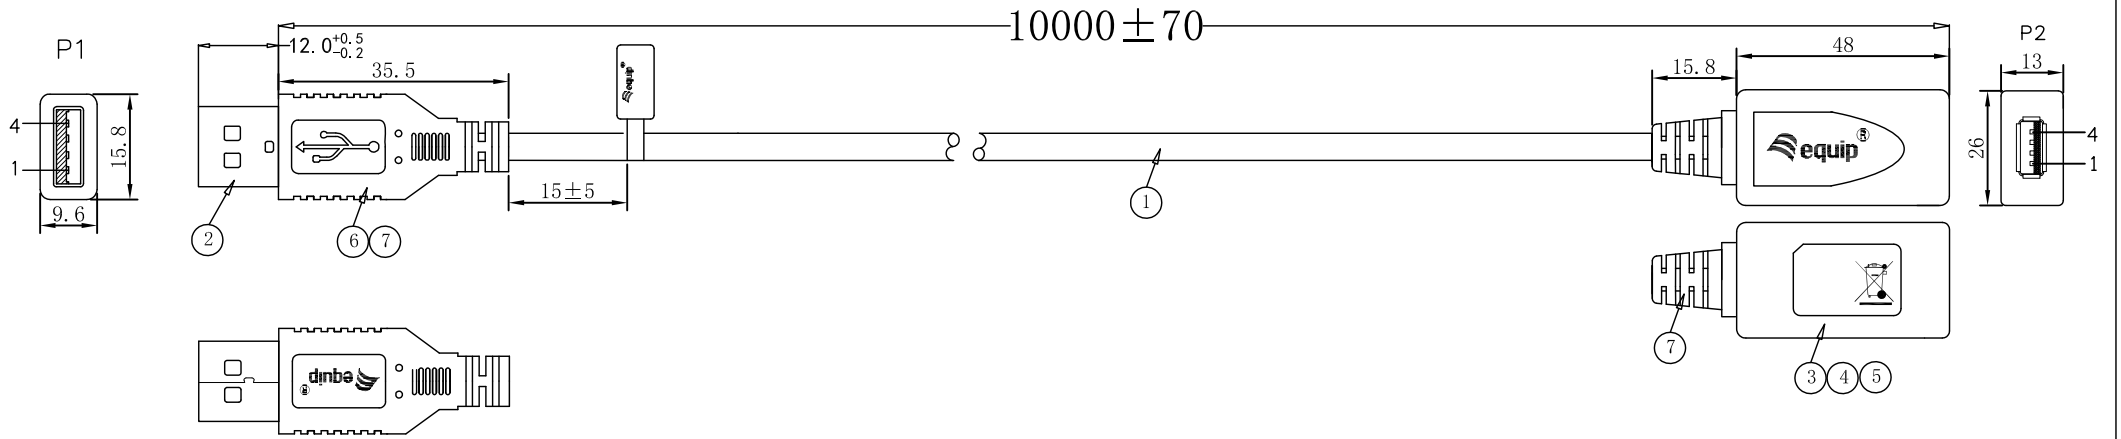

ELECTRONIC TEST:

- A.OPEN/SHORT/INTERMITTENCE: 100%.
- B.HI-POT: AC 300V 0.01S 1mA
- C.INSULATION RESISTANCE:DC300V 10MΩ(MIN)
- D.CONDUCTIVE RESISTANCE:10 OHM (MAX)

PIN OUT

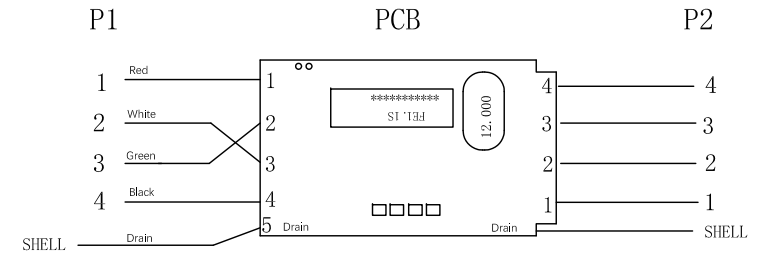


7	MOLDED	45P BLACK PVC	16	G				
6	MOLDED	LDPE	3	G				
5	SHELL	Black ABS Shell	2	PCS	PROJ:	TOLERANCE: XX= XXX=	PRODUCT NAME: USB Active extension cable	
4	PCB	PCB, FE1.1S	2	PCS	SCALE: NONE	REV: A	PART NO: 133310V3	
3	CONNECTOR	USB A Female : PIN G/F, Shell Nickel plated	1	PCS	UNIT: MM	SHEET: 1/1	CUST:	
2	CONNECTOR	USB A Male : PIN G/F, Shell Nickel plated	1	PCS	CUST APPROVED:			
1	CABLE	UL2725 28#(7/0.127TC)*1PR+24#(7/0.2TC) *2C+AL+D(1/0.254BC)+B (64/0.12LMS) Black PVC OD=4.8mm	10000	MM	APPROVED:			
					CHECKED:			
NO	NAME	SPECIFICATIONS	Q'TY	UNIT	DRAWING: Ceasar 09/27/2020			





RoHS compliant

REV	MODIFICATION	DATE
A	ISSUE	09/27/2020

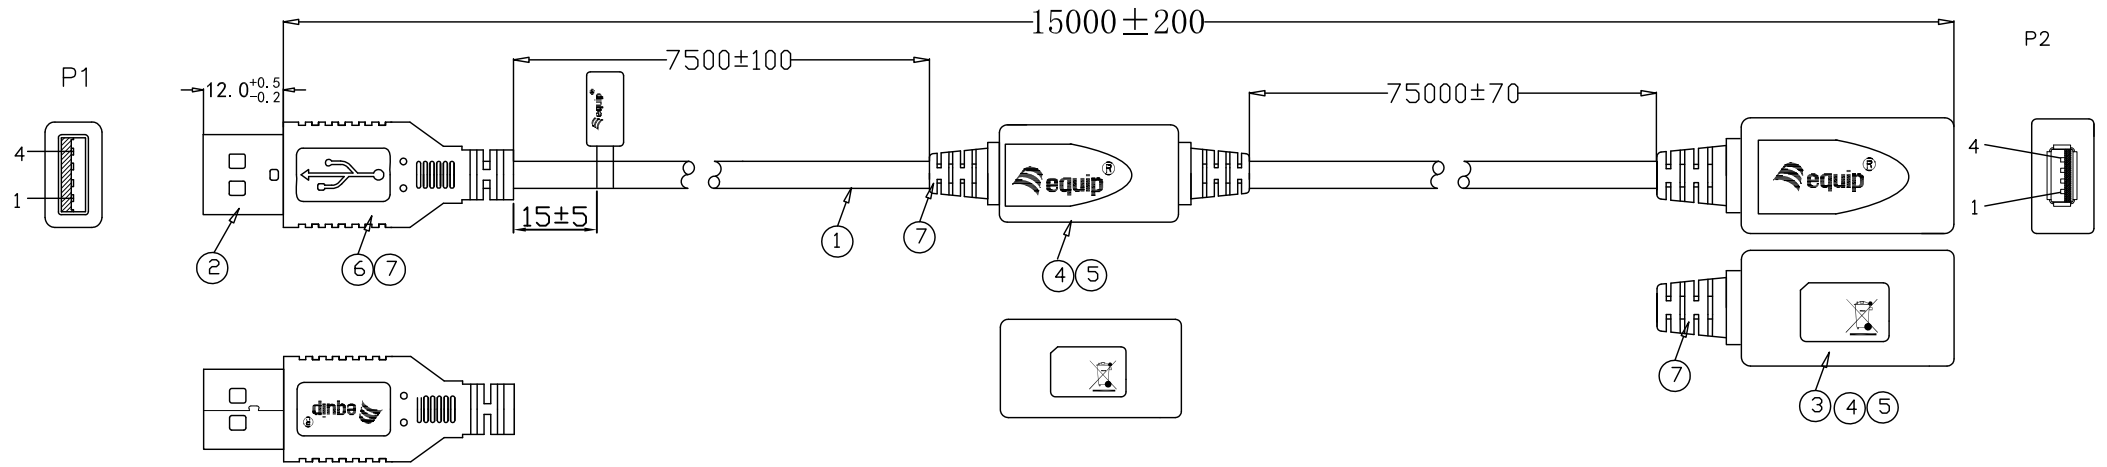

ELECTRONIC TEST:

- A.OPEN/SHORT/INTERMITTENCE: 100%.
- B.HI-POT: AC 300V 0.01S 1mA
- C.INSULATION RESISTANCE:DC300V 10MΩ(MIN)
- D.CONDUCTIVE RESISTANCE:10 OHM (MAX)

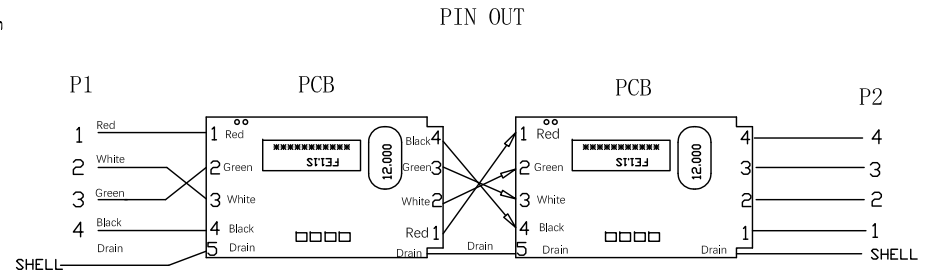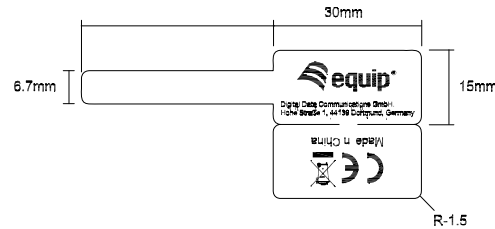

7	MOLDED	45P BLACK PVC	16	G				
6	MOLDED	LDPE	3	G				
5	SHELL	Black ABS Shell	2	PCS	PROJ:	TOLERANCE: XX=XXX=	PRODUCT NAME: USB Active extension cable	
4	PCB	PCB, FE1.1S	2	PCS	SCALE: NONE	REV: A	PART NO: 133311V3	
3	CONNECTOR	USB A Female : PIN G/F, Shell Nickel plated	1	PCS	UNIT: MM	SHEET: 1/1	CUST:	
2	CONNECTOR	USB A Male : PIN G/F, Shell Nickel plated	1	PCS	CUST APPROVED:			
1	CABLE	UL2725 28#(7/0.127TC)*1PR+24#(7/0.2TC)*2C+AL+D(1/0.254BC)+B (64/0.12LMS) Black PVC OD=4.8mm	15000	MM	APPROVED:			
					CHECKED:			
NO	NAME	SPECIFICATIONS	Q'TY	UNIT	DRAWING: Ceasar 09/27/2020			

