




USB 2.0 Extension Cable (5M)

Universal I 133336

| Product Dimensions

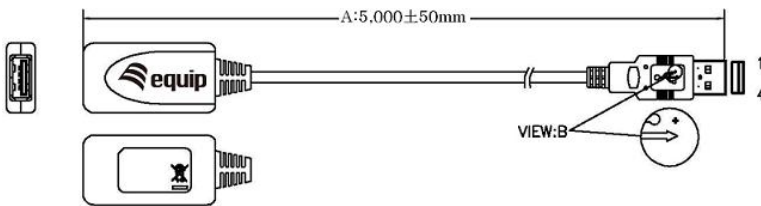

| Key Features


- Provides 5 meters signal booster via USB 2.0
- Compliant with USB Specification
- Data transfer rate up to 480Mbps
- Plug-and-Play: No power supply needed
- Connectors: Type A USB Male to Type A USB Female
- Supports Windows 98/2000/XP/Vista/7, Mac OS V9.0 or above

| Package Contents

- 1 x USB 2.0 Extension Cable


RoHS compliant

REV	MODIFICATION	DATE
A	ISSUE	09/27/2020

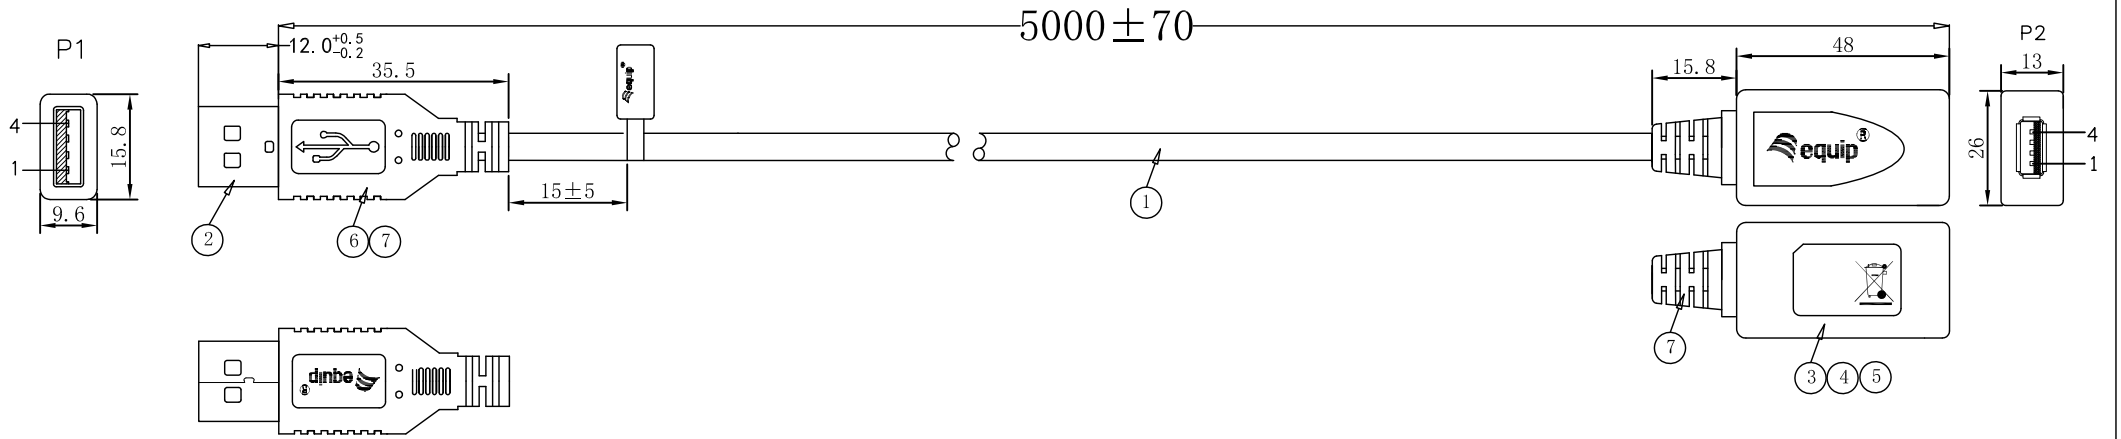


ELECTRONIC TEST:

- A.OPEN/SHORT/INTERMITTENCE: 100%.
- B.HI-POT: AC 300V 0.01S 1mA
- C.INSULATION RESISTANCE:DC300V 10MΩ(MIN)
- D.CONDUCTIVE RESISTANCE:10 OHM (MAX)

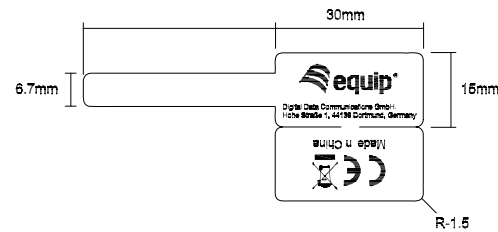

PIN OUT

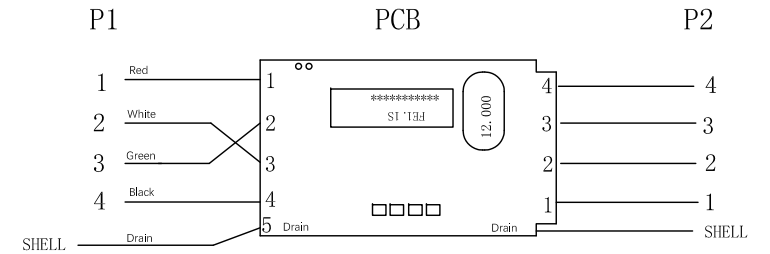

7	MOLDED	45P BLACK PVC	16	G				
6	MOLDED	LDPE	3	G				
5	SHELL	Black ABS Shell	2	PCS	PROJ:	TOLERANCE: XX= XXX=	PRODUCT NAME: USB Active extension cable	
4	PCB	PCB, FE1.1S	2	PCS	SCALE: NONE	REV: A	PART NO: 133336	
3	CONNECTOR	USB A Female : PIN G/F, Shell Nickel plated	1	PCS	UNIT: MM	SHEET: 1/1	CUST:	
2	CONNECTOR	USB A Male : PIN G/F, Shell Nickel plated	1	PCS	CUST APPROVED:			
1	CABLE	UL2725 28#(7/0.127TC)*1PR+24#(7/0.2TC) *2C+AL+D(1/0.254BC)+B (64/0.12LMS) Black PVC OD=4.8mm	5000	MM	APPROVED:			
					CHECKED:			
NO	NAME	SPECIFICATIONS	Q'TY	UNIT	DRAWING: Cesar 09/27/2020			

