

RJ45 RIGHT ANGLE JACK      IDC Krone 45°-110 Dual

SCALE 1/4



Specification :

Material :

1. Panel : SPCC, 1.3 mm thickness with black color painted.
2. RJ45 Jack Housing : PBT, UL 94V-0.
3. RJ45 Jack contact material & finished :
  - 3-1. Phosphor Bronze with 50-60 micro-inch Nickel plated.
  - 3-2. Contact area : Min. 3mm 50 micro-inch Gold plated.
4. IDC Housing : PC, UL 94V-2, KRONE dual.
5. IDC Terminal material & finished :
  - 5-1. Phosphor Bronze with 50 micro-inch Tin-Lead plating over 50-60 micro-inch Nickel plated.
  - 5-2. 110 & Krone tool compatible.
  - 5-3. Use for 22-26 AWG stranded & solid wire.

Performance :

- a. The IDC color codes combine two wirings of T568A & T568B.
- b. Insertion force : 900 gms for 8 contacts.
- c. Retention strength : 7.7 kgs between Jack and Plug.
- d. Operation temperature : -40°C to 80°C.
- e. Durability :
  - e-1. Jack : 750 cycles Plug-Jack mating and unmating test, insertion cycles at 20 cycles/minute max. Contact resistance test per 100 cycles.
  - e-2. IDC : Max. 200 punching times.
- f. The Cat.6 performance is in compliance with the ANSI/TIA/EIA 568 B.2-1 standard.

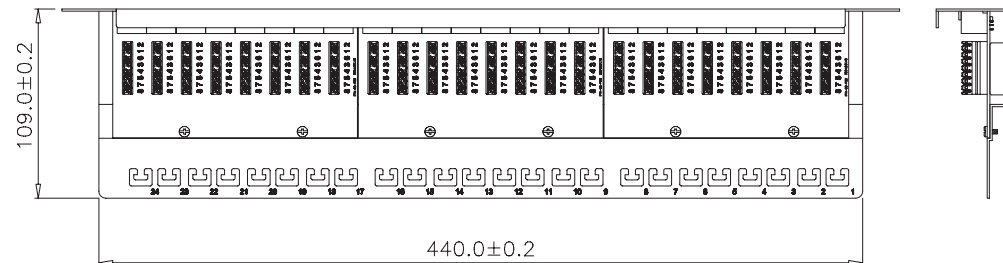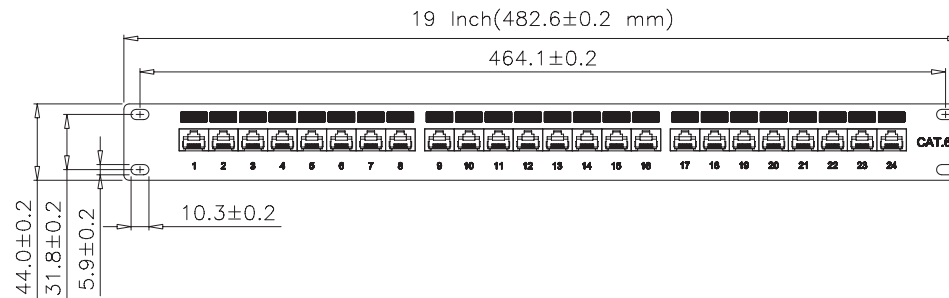

GENERAL TOLERANCE OF DIMENSIONS	
X.XXX	±0.005
X.XX	±0.05
X.X	±0.1



Cat.6 Patch Panel 24 Port UTP, 90° Type,  
Krone 45° - 110 Dual IDC, 1U, black

1

2

0

3

4

10cm

5

6