



3000VA 2700W UPS

38200203

The equip® THE RACK-TOWER HIGH POWER DENSITY PURE SINEWAVE LINE INTERACTIVE UPS

#### Key Features

- High Frequency Topology
- 0.9 Output Power Factor
- Pure Sinewave Output
- Output THDV <3%
- Selectable Line Sensitive
- Intelligent LCD Display
- Swappable LCD Direction
- Easy Battery Replacement
- Rack-Tower 2-in-1 Design
- Extended Run Time
- Power Management Software
- Multiple Communication Ports
- Optional SNMP and Relay Card
- Self-Monitoring and Fault Diagnosis
- Load Segments Control


#### Ordering Information

Model no.: 38200203

EAN: 4015867196250

#### Package Contents

- User Manual
- USB 2.0 Cable
- Resource CD
- Power cord (x3)
- Rack ears
- Screw kit
- EPO connector
- Bracket
- Rubber Feet

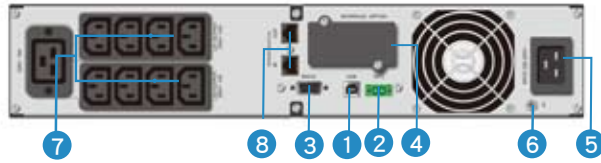

1. USB Port
2. EPO
3. RS232 Port
4. Intelligent Slot
5. Input Socket
6. Earth Line Port
7. Output Socket
8. Modem/Network Surge Protection

Model		32800203	
CAPACITY	VA/W	3000VA/2700W	
	Voltage Range	0~300VAC	
INPUT	Frequency Range	50/60HZ ± 5HZ	
	Phase	Single Phase	
	Voltage	220/230/240VAC	
OUTPUT	Voltage Regulation	± 5 %	
	Frequency	50/60HZ ± 5HZ	
	Frequency (BAT Mode)	50/60HZ ± 0.1HZ	
	Current Crest Ratio	≥ 3:1	
	THDv	< 3% THD @ linear load < 6% THD @ non-linear load	
	Output Waveform	Pure sine wave	
	Outlet	IEC C13 (8), IEC C19 (1)	
	Overload Capacity	Line Mode	110% +/-10%; Fault after 3 Minutes
		BAT Mode	150% +/-10%; fault after 10 cycles minimum
	EFFICIENCY	Line Mode	>96%, @Full Load and Battery Fully Charged
BAT Mode		>82%, @12V <sub>DC</sub> Battery	
BATTERY	Number of Internal Batteries Per Set	6pcs	
	Battery Type	12VDC/9Ah	
	Backup Time	3 minutes	
	Recharge Time	4h 90%	
	Charging Current(max)	1.5A	
	Rated Battery Voltage	72V	
EBM	Number of Batteries Per Set	6pcs x 2	
	Battery Type	12V/7Ah	
TRANSFER TIME	BAT <-> LINE	2 ~ 6 ms typical, 13ms max	
INDICATOR	LCD	Load/Battery/Input/Output/Operating Mode Information	
	BAT Mode	Sounding every 4 seconds	
AUDIBLE ALARM	Battery Test	Sounding every 2 seconds	
	USP Fault	Continuously sounding	
	Overload capacity/Battery Disconnected/ Battery Low	Sounding every 1 second	
	DIMENSION	Case (DxWxH)mm	438x86.5x608
ENVIRONMENT	Rack/Tower	2U	
	Operation Environment	0~40 °C	
	Relative Humidity	0~95% (No condensing)	
INTERFACE	Line Mode Noise Level	<45dB	
	Battery Mode Noise Level	<50dB	
	RS232/USB	Optional	
	Intelligent Slot	Optional	
	EPO	Yes	