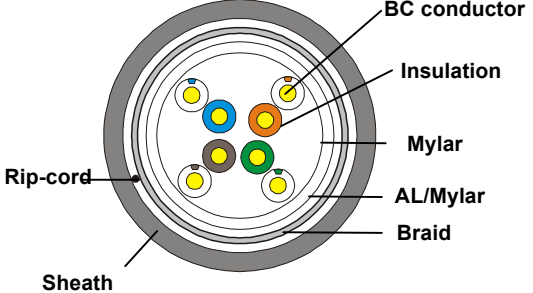


SF/UTP 4 pairs cable - category 5E - LSZH Sheath

P/N: 624647

Date	Prepared by	Checked by	Approved by	Version	Revision Declaration																																																											
2017-07-16	Caihangle	Nidonghua	Nidonghua	A1																																																												
Content of the Data Sheet																																																																
Sheath Printing	TBD																																																															
Customer No.		Customer Reference																																																														
Category	SF/UTP CAT5e-4P-LSZH-TC40(Eca)																																																															
Reference Standard	ISO/IEC11801、TIA-568-C.2																																																															
Conductor	Material	SOLID-Bare Copper																																																														
	Nom. O.D. (mm)	0.495	<table border="1"> <tr> <td>Up</td> <td>+0.005</td> </tr> <tr> <td>Down</td> <td>-0.005</td> </tr> </table>							Up	+0.005	Down	-0.005																																																			
Up	+0.005																																																															
Down	-0.005																																																															
Insulation	Material	HDPE																																																														
	Diameter	0.95±0.05mm																																																														
Color	A.Blue, White-Blue	B.Orange,White-Orange																																																														
	C.Green,White-Green	D.Brown, White-Brown																																																														
Inner Shield Material	Mylar+AL/Mylar	Drain wire	No	Technical Performance (100m): <table border="1"> <thead> <tr> <th>Frequency (MHz)</th> <th>RL (dB)</th> <th>ATT (dB)</th> <th>NEXT (dB)</th> <th>DELAY (ns)</th> </tr> </thead> <tbody> <tr><td>1</td><td>20.0</td><td>—</td><td>65.3</td><td>570.00</td></tr> <tr><td>4.0</td><td>23.0</td><td>4.1</td><td>56.3</td><td>552.00</td></tr> <tr><td>8.0</td><td>24.5</td><td>5.8</td><td>51.8</td><td>546.73</td></tr> <tr><td>10.0</td><td>25.0</td><td>6.5</td><td>50.3</td><td>545.38</td></tr> <tr><td>16.0</td><td>25.0</td><td>8.2</td><td>47.2</td><td>543.00</td></tr> <tr><td>20.0</td><td>25.0</td><td>9.3</td><td>45.8</td><td>542.05</td></tr> <tr><td>25.0</td><td>24.3</td><td>10.4</td><td>44.3</td><td>541.20</td></tr> <tr><td>31.25</td><td>23.6</td><td>11.7</td><td>42.9</td><td>540.44</td></tr> <tr><td>62.5</td><td>21.5</td><td>17.0</td><td>38.4</td><td>538.55</td></tr> <tr><td>100</td><td>20.1</td><td>22.0</td><td>35.3</td><td>537.60</td></tr> </tbody> </table>						Frequency (MHz)	RL (dB)	ATT (dB)	NEXT (dB)	DELAY (ns)	1	20.0	—	65.3	570.00	4.0	23.0	4.1	56.3	552.00	8.0	24.5	5.8	51.8	546.73	10.0	25.0	6.5	50.3	545.38	16.0	25.0	8.2	47.2	543.00	20.0	25.0	9.3	45.8	542.05	25.0	24.3	10.4	44.3	541.20	31.25	23.6	11.7	42.9	540.44	62.5	21.5	17.0	38.4	538.55	100	20.1	22.0	35.3	537.60
Frequency (MHz)	RL (dB)	ATT (dB)	NEXT (dB)	DELAY (ns)																																																												
1	20.0	—	65.3	570.00																																																												
4.0	23.0	4.1	56.3	552.00																																																												
8.0	24.5	5.8	51.8	546.73																																																												
10.0	25.0	6.5	50.3	545.38																																																												
16.0	25.0	8.2	47.2	543.00																																																												
20.0	25.0	9.3	45.8	542.05																																																												
25.0	24.3	10.4	44.3	541.20																																																												
31.25	23.6	11.7	42.9	540.44																																																												
62.5	21.5	17.0	38.4	538.55																																																												
100	20.1	22.0	35.3	537.60																																																												
Braid	Tinned copper 0.10mm	Coverage	≥40%	<table border="1"> <thead> <tr> <th>Frequency (MHz)</th> <th>PSNEXT (dB)</th> <th>ELFEXT (dB)</th> <th>PSELFEXT (dB)</th> </tr> </thead> <tbody> <tr><td>1</td><td>62.3</td><td>63.8</td><td>60.8</td></tr> <tr><td>4</td><td>53.3</td><td>51.8</td><td>48.8</td></tr> <tr><td>8</td><td>48.8</td><td>45.7</td><td>42.7</td></tr> <tr><td>10</td><td>47.3</td><td>43.8</td><td>40.8</td></tr> <tr><td>16</td><td>44.4</td><td>39.7</td><td>36.7</td></tr> <tr><td>20</td><td>42.8</td><td>37.8</td><td>34.8</td></tr> <tr><td>25</td><td>41.3</td><td>35.8</td><td>32.8</td></tr> <tr><td>31.25</td><td>39.9</td><td>33.9</td><td>30.9</td></tr> <tr><td>62.5</td><td>35.4</td><td>27.9</td><td>24.9</td></tr> <tr><td>100</td><td>32.3</td><td>23.8</td><td>20.8</td></tr> </tbody> </table>						Frequency (MHz)	PSNEXT (dB)	ELFEXT (dB)	PSELFEXT (dB)	1	62.3	63.8	60.8	4	53.3	51.8	48.8	8	48.8	45.7	42.7	10	47.3	43.8	40.8	16	44.4	39.7	36.7	20	42.8	37.8	34.8	25	41.3	35.8	32.8	31.25	39.9	33.9	30.9	62.5	35.4	27.9	24.9	100	32.3	23.8	20.8											
Frequency (MHz)	PSNEXT (dB)	ELFEXT (dB)	PSELFEXT (dB)																																																													
1	62.3	63.8	60.8																																																													
4	53.3	51.8	48.8																																																													
8	48.8	45.7	42.7																																																													
10	47.3	43.8	40.8																																																													
16	44.4	39.7	36.7																																																													
20	42.8	37.8	34.8																																																													
25	41.3	35.8	32.8																																																													
31.25	39.9	33.9	30.9																																																													
62.5	35.4	27.9	24.9																																																													
100	32.3	23.8	20.8																																																													
Sheath	Thickness	0.55±0.05 mm																																																														
	External O.D.	6.4±0.5 mm																																																														
	Surface	Clean,Frap,Satiation																																																														
	Material	LSZH(complies RoHS)																																																														
	Color	TBD																																																														
Surface Printing	Letter height	3.0±0.3mm																																																														
	Color	Black																																																														
	Print error & Space	≤±0.5%, 1m																																																														
Packing	Wooden Tray & Carton																																																															
Carton dimension	According to the requires																																																															
Packing length	305±1.5m																																																															
Rip-cord	Yes																																																															
Out Jacket Physical Properties	Before Aging Tensile Strength (Mpa)	≥10.0																																																														
	Elongation(%)	≥125																																																														
	Aging Period((°C × hrs)	100°C × 24h × 7d																																																														
	After Aging Tensile Strength(Mpa)	≥8.0																																																														
	Elongation(%)	≥100																																																														
Cold bend(-20±2□×4h) 8×Cable O.D., No visible cracks																																																																
Electrical Characteristics (20°C)	1.0-100.0MHz, Characteristic impedance (Ω)	100±15																																																														
	1.0-100.0MHz, Delay Skew 20°C(ns/100m)	≤45																																																														
	Unbalanced-to-ground capacitance (pf/100m) max	330																																																														
	DC Resistance 20°C(Ω/100m) max	9.5																																																														
	DC Conductor Resistance Unbalance (%)max	5.0																																																														
Reaction to fire Classification: Eca																																																																