

www.equip-info.net




Cat.6 U/UTP Outdoor Installation Cable

40451007

The equip® Outdoor Installation Cable is composed of absolutely best quality materials and thoroughly tested to meet and even surpass industrial standards. Compared to previous Cat.5e products, the Cat.6 patch cable features higher bandwidth and a better signal-to-noise ratio, making it the best solution for developing Gigabit Ethernet environments.

Structure

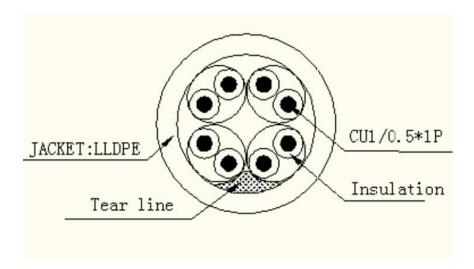



www.equip-info.net

I Specification

Conductor	Material	Bare Copper
	Construction	23AWG, 1/0.57 ± 0.005mm
Insulation	Material	HD-PE
	Thickness	MIN at any point: 0.18 mm / MAX AVG:0.22 mm
	Diameter	1.00 ± 0.03 mm
	Colors	Blue-White/Blue, Orange-White/Orange, Green-White/Green, Brown-White/Brown
Cable	Tear Line	1000D
Jacket	Material	LLDPE
	Thickness	MIN at any point: 0.40mm / MAX AVG: 0.55mm
	Diameter	6.0 ± 0.10 mm
	Colors	Grey
	Marking	UTP CAT.6 23AWG/1×4P CABLE ISO/IEC 11801
		& TIA/EIA SOLID 001M 002M305M

Ordering Information

PN	EAN	Length	Packing	Weight
40451007	4015867189504	305m	Equip EZ Box	7.5Kg

I Typical Applications

■ IEEE 802.3: 10Base-T; 100Base-T; 1000Base-T

Complies with ISO/IEC 11801 2nd edition and TIA/EIA 568C standards